BEST AVAILABLE COPY

Application No.: 10/815,082

Amendment Date: November 29, 2006

Reply to Office Action: January 25, 2006 and November 3, 2006

Page 6

REMARKS/ARGUMENTS

Claims 1-10 and 11-27 remain in this application. Claims 1, 13, 21, and 24-26 have been

amended. Claim 11 has been cancelled.

Non-compliant amendment

The examiner stated that at least in claim 1 the newly added text was not underlined. Upon

review of claim 1 Applicants realised that the word "and" (situated before the following

underlined text "wherein the optical energy is guided in a mode having a nonlinear refractive

index of less than about 10⁻¹⁸ cm²/W") was not underlined. Accordingly, the word "and" is

now underlined.

Claim 24 stands rejected under 35 USC 112, second paragraph, as being indefinite for

failing to particularly point out and distinctly claim the subject matter which applicant

regards as the invention.

The Examiner stated that the term "soliton" is being interpreted as "optical energy". However,

the term "soliton" applies to a very special case of optical energy. The term "soliton" is well

<u>known in the art of optics</u>. It's a pulse of optical energy that travels without changing its

shape.

Applicants' attorney is including several references including pgs. 60-61 from the book

entitled "Fiber Optics Communications", by Joseph Pallais, along with several papers that

explain the solitons in more detail.

Claim 24 has been amended to state that the optical energy propagates as temporal soliton that

has a wavelength within the photonic band gap. Accordingly, Applicants respectfully submit

that claim 24 is not indefinite.

Claims 1, 4, 6-8, 13, 15, 17, 18 and 25-27 are rejected under 35 USC 103(a) as being

unpatentable over Kawanishi et al (US 6,404,966 B1).

Applicant's claim 1 states that the core region with a loss of less than about 300 dB/km.

Application No.: 10/815,082

Amendment Date: November 29, 2006

Reply to Office Action: January 25, 2006 and November 3, 2006

Page 7

The Examiner stated that Kawanishi et all teach an optical fiber where "The photonic band gap structure guides the optical energy substantially within the core region with loss of about 0.01 dB/km". This statement is different from that made in the cited reference. Col. 3, lns. 39-42 of the Kawanishi state that "The optical fiber according to the present embodiment can be expected to have a loss characteristic of about 0.01 dB/km".

That is, the reference never disclosed such fiber, the Kawanishi et al was simply hoping that the fiber would be capable of this performance. In fact it is not. Because it requires more than an air filled core to achieve this performance, and because Kawanishi et all does not describe these factors, this statement is akin to telling those of skill in the art to look for a needle in the haystack. The Kawanishi reference does not disclose an enabling embodiment that allows the fiber have a loss characteristic of about 0.01 dB/km.

Therefore, claim 1 is not obvious over the Kawanishi reference.

Furthermore, claim 1 has been amended to include the subject matter of the original claim 11, which states that "the optical energy is guided in a mode having a nonlinear refractive index of less than about 10⁻¹⁸ cm²/W."

This parameter contributes to the low loss and is not taught or disclosed by the cited reference. In fact, pg. 7, paragraph [0033] of the Applicants specification discloses that in typically the guided modes have effective nonlinear refractive indices n_2 ranging from $2x10^{-16}$ cm²/W to $4x10^{-16}$ cm²/W while some of the claims call for it being less than 10^{-18} cm²/W. This is at least a factor of 10 different (20 times less) than that of the known fibers.

Claims 4, 6-8 13, 15, 17 and 18 depend from claim 1 as their base claim and, therefore, explicitly incorporate the language of claim 1. Accordingly Applicants respectfully submit that claims 1, 4, 6-8 13, 15, 17 and 18 are not obvious over the Kawanishi reference.

Claims 25-27 (and 13) state that the "optical fiber is configured to support a temporal soliton having a peak power of greater than about 1 MW". Such fiber is not disclosed by the Kawanishi reference, and the Kawanishi reference provides no incentive for having a fiber

Application No.: 10/815,082

Amendment Date: November 29, 2006

Reply to Office Action: January 25, 2006 and November 3, 2006

Page 8

with this characteristics. Accordingly, claims 13 and 25-27 are not obvious over this reference.

Claims 1-3, 5, 6-10, 13, 14, 16-18 and 25-27 are rejected under 35 USC 103(a) as being unpatentable over Libori et al (US 6,792,188 B2).

Although Libori makes a statement that a low loss fiber is desirable, Libori does not define what is meant by a "low loss", nor provides an enabling embodiment that has the losses in the Applicant's claimed range. A mere statement that something is desirable, without a way of how to achieve such a result, does not constitute an enabling disclosure. The conditions for achievement of loss less than 300 dB/km (or less than 50 dB/km, or less than 20 dB/km) were disclosed by the Applicants and were not known to one of ordinary skill in the art, although the was a long felt need to have a fiber with these characteristics.

Furthermore, as stated above, Claims 25-27 call for the "optical fiber is configured to support a temporal soliton having a peak power of greater than about 1 MW". Such fiber is not disclosed by the Liborui reference, and the reference provides no incentive for having a fiber with this characteristics.

Accordingly, claims 1-3, 5, 6-10, 13, 14, 16-18 and 25-27 are not unpatentable over Libori, et al.

Claims 1, 4, 6, 7, 11, 12, 15 and 19-27 are rejected under 35 USC 103(a) as being unpatentable over Fajardo et al (US 6,444,133 B1).

The Fajardo reference does not disclose the fiber with ether a loss of a loss of less than about 300 dB/km, less than 50 dB/km, etc, or that has a nonlinear refractive index of less than about 10^{-18} cm²/W, or less than $5x10^{-19}$ cm²/W. As stated above according to applicant's claims, this nonlinear refractive index of one to two orders of magnitude smaller than similar known fibers (and certainly not within general ranges disclosed by prior art fiber references), and this characteristic has not been disclosed in any of the cited reference. Since the cited references, neither singly, nor in combination do not recite optical fiber with this feature, claims 1, 4, 6, 7, 11, 12, 15 and 19-27 (or other claim) are not obvious over Fajardo, or other cited references.

Application No.: 10/815,082

Amendment Date: November 29, 2006

Reply to Office Action: January 25, 2006 and November 3, 2006

Page 9

Conclusion

Based upon the above amendments, remarks, and papers of records, applicant believes the

pending claims of the above-captioned application are in allowable form and patentable over

the prior art of record. Applicant respectfully requests that a timely Notice of Allowance be

issued in this case.

Applicant believes that no extension of time is necessary to make this Reply timely. Should

applicant be in error, applicant respectfully requests that the Office grant such time extension

pursuant to 37 C.F.R. § 1.136(a) as necessary to make this Reply timely, and hereby authorizes

the Office to charge any necessary fee or surcharge with respect to said time extension to the

deposit account of the undersigned firm of attorneys, Deposit Account 03-3325.

Please direct any questions or comments to Svetlana Z. Short at 607-974-0412.

DATE: 11-29-08

Respectfully submitted,

Svetlana Z. Short

Attorney for Assignee

Registration Number: 34,432

ana.


Corning Incorporated

SP-TI-03-1


Corning, NY 14831

Phone: 607-974-0412

FIBER OPTIC COMMUNICATIONS

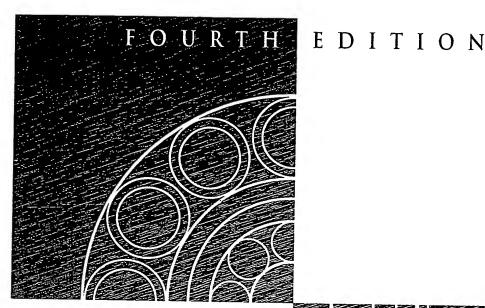

JOSEPH C. PALAI



where the slope M_0 is approximately -0.095 ps/(nm² × km), λ_0 is the zero-dispersion wavelength, and all wavelengths are in nm. Values of M_0 and λ_0 are often given by the fiber manufacturer. The minus sign is needed because of the negative slope of the dispersion curve. Some reverse the sign conventions followed in this section, so that their dispersion curves have a positive slope and the minus sign is missing in Eq. (3-14).

Example 3-3

Compute the material dispersion at 1.55 μ m if the zero-dispersion wavelength is 1.3 μ m.

Solution:

It is most straightforward to solve the preceding equation by using the wavelengths expressed in nm. Otherwise, the slope coefficient M_0 would have to be converted into the appropriate units. Thus

$$M = \frac{-0.095}{4} \left(1550 - \frac{1300^4}{1550^3} \right)$$
$$= -18.6 \text{ ps/(nm} \times \text{km)}$$

a result that checks nicely with the value obtained directly from Fig. 3-8.

Example 3-4

Compute the pulse spread when the light source emits at 1320 nm and has a 2-nm spectral width. The zero-dispersion wavelength is 1300 nm.

Solution:

The dispersion turns out to have a magnitude of 1.86 ps/(nm \times km), so that Eq. (3-14) yields a spread of $\Delta(\tau/L) = 2 \times 1.86 = 3.72$ ps/km. A 10-km length of this material would produce a pulse spread of only 37.2 ps = 0.0372

ns, considerably smaller than that computed in Examples 3-1 and 3-2 for propagation at wavelengths farther away from the dispersion minimum.

Solitons

Pulse spreading reduces the bandwidth and data capacity of a fiber communications link in the manner described later in this section. Because of this, many techniques for minimizing pulse spreading have been pursued. A few that we already know about are (1) operating at the zero-dispersion wavelength and (2) choosing very coherent (small spectral width) light sources. These solutions (often applied together) have been common since the mid-1980s. Improvements now take the form of shifting the fiber's zero-dispersion point to wavelengths of lower fiber attenuation and producing more coherent laser sources.

Another technique that shows promise for reducing pulse spreading is the production of solitons.3 A soliton is a pulse that travels along a fiber without changing shape. How can this happen? The actual procedure is fairly complicated, but some insight into soliton propagation can be easily developed. Pulses broaden because dispersion causes some wavelengths emitted by the light source to travel faster than other wavelengths. All we need do is find some property of the fiber that counters this tendency. It turns out that such a property does exist. It is a fiber nonlinearity where the index of refraction depends upon the intensity of the light beam. Since the pulse velocity depends on the index of refraction, it is clear that the intensity of the beam can itself influence the speed of the various wavelengths propagating along the fiber. Usually this phenomenon is not observed, because it is quite small and requires a moderately large amount of optical power before becoming significant.

To form a soliton, the initial pulse must have a particular peak energy and pulse shape.

or than that comand 3-2 for propfarther away from t.

bandwidth and unications link in this section. Besorber minimizing sued. A few that operating at the end (2) choosing ral width light often applied tosince the midake the form of persion point to attenuation and sources.

shows promise is the production oulse that travels ng shape. How al procedure is insight into soliisily developed. spersion causes the light source elengths. All we of the fiber that is out that such a iber nonlinearity lepends upon the nce the pulse vef refraction, it is beam can itself ous wavelengths Jsually this phecause it is quite :ly large amount ning significant. nitial pulse must and pulse shape.

To be specific, the product of pulse energy and pulse width must be a constant. The value of the constant depends on the magnitudes of the dispersion and the nonlinearity. With too little power, the nonlinearity is too weak to be effective in compensating for dispersion. If the power is too great, then the pulse may actually continually change widths as it travels, owing to imperfect (and distance-dependent) compensation. In addition, the nonlinear compensation is such that solitons are produced only at wavelengths longer than the zero-dispersion wavelength in glass fibers. That is, the nonlinearity acts with dispersion to further broaden pulses at the shorter wavelengths and only compensates at the longer ones. We conclude that soliton pulses can be expected in silica fibers only when operating in the 1300- to 1600-nm range.

Although solitons retain pulse widths during propagation, solitons do attenuate just like other waves. It will be imperative for long systems that the optical beam be amplified periodically so that the pulse energy not fall below that required for soliton maintenance. Various optical amplifiers (to be described in Section 6-7) are candidates for the amplification process.

Soliton widths of a few picoseconds are realizable. The corresponding data rates (the inverse of the soliton widths) are over 10 Gbps. Multigigabit-per-second systems covering many thousand kilometers with amplifier spacings of several tens of kilometers can be designed with soliton pulses. The product of data rate and fiber path length for such systems is far greater than can be achieved by more conventional fiber techniques.

Information Rate

Pulse spreading limits the information capacity of any transmission system in the manner described in what follows. For numerical calcu-

lations we will use the spreads generated by material dispersion. The equations developed apply regardless of the cause of the distortion. We will investigate the limits on both analog and digital links. Without long and complex derivations, exact results cannot be obtained. Reasonable limits can be developed based on approximate intuitive analyses. The results obtained will be useful in first-order design and will deepen understanding of the ability of fiber links to carry information.

First, consider a sinusoidally modulated beam of light (like that shown in Fig. 3-5). The modulation frequency is f and the period is T = 1/f. Suppose that the source radiates optic wavelengths between λ_1 and λ_2 . How much delay between the fastest and slowest wavelength is acceptable? Figure 3-9 shows the received power at λ_1 and λ_2 when the delay is equal to half the modulation period; that is,

$$\Delta \tau = \frac{T}{2} \tag{3-15}$$

With this amount of delay, the modulation cancels out completely when the two waves are added. Modulated power carried at wavelengths between λ_1 and λ_2 will have delays smaller than T/2 and will partially cancel, resulting in a small signal variation at the receiver. If we take Eq. (3-15) as the maximum




Figure 3-9 Canceling of the modulation when two carrier wavelengths have a delay of half the modulation period. $\Delta \tau = T/2$.

τ





Last update: 2006-03-28

Encyclopedia of Laser Physics and Technology Dr. Rüdiger Paschotta

Μ G В C D Ε S T X Z R

Solitons

home | previous | next | feedback

Definition: pulses with a certain balance of nonlinear and dispersive effects

In general, the temporal and spectral shape of a short optical pulse changes during propagation in a transparent medium due to the Kerr effect and dispersion. Under certain circumstances, however, the effects of Kerr nonlinearity and dispersion can exactly cancel each other, apart from a constant phase delay per unit propagation distance, so that the temporal and spectral shape of the pulses is preserved even over long propagation distances. The conditions for that to happen are:

- For a positive value of the nonlinear coefficient n_2 (as is usual for most modia) the dispersion needs to $P(t) = P_p \operatorname{sech}^2(t/\tau) = \frac{P_p}{\cosh^2(t/\tau)}$ has to be that of an unchirped sech² pulse (assuming that the

$$E_{\rm p} = \frac{2|D|}{|\gamma|\tau}$$

The pulse energy $E_{\rm p}$ and soliton pulse duration have to meet the following condition:

group delay dispersion is constant):

This encyclopedia is provided by

-RP Photonics

Utilize this expertise also in the form of consulting services!

offers femtosecond fiber lasers and optical frequency synthesizers.

Comparison of Technologies

Get a solid basis for your technological and investment decisions. RP Photonics gives impartial advice.

Europhoton 2006 Conference

in Pisa, Italy, Sept. 10-15: submit your paper now! Deadline: April 19.

Laser Modeling

e.g. concerning cavity design, optimized power efficiency, beam quality, etc.: the key to advanced product designs. Contact RP Photonics!

In-House Staff Training

e.g. on diode-pumped solid state lasers. nonlinear frequency conversion, fiber optics, etc.: tailored courses will boost the effectiveness of your team!


RP Q-switch

A powerful software tool for designing Q-switched lasers. See the details.


Your Advertisement at This Place

will be seen by many thousands of visitors per month. Check the details.

the full-width-at-half-maximum pulse duration is about 1.76 times , γ is the SPM coefficient (in rad per Watt and



peak or the pulse would experience it only the nonlinearity alone would act on it. This soliton phase shift is constant over time or frequency, i.e., it does not lead to a chirp, and it is in many situations not relevant.

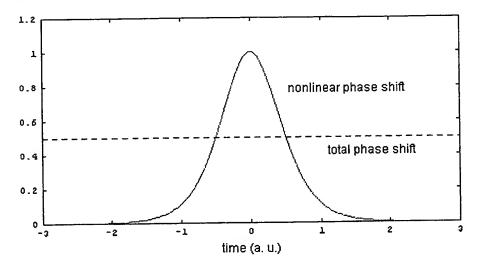

Solid curve: time-Fig.: dependent nonlinear phase shift (without dispersion), alone which is proportional to the optical intensity. Dotted curve: overall phase shift, resulting from the combined action of nonlinearity and dispersion on a soliton. The constant phase shift does not modify the temporal or spectral shape of the pulse.

The most remarkable fact is actually not the possibility of such a balance of dispersion and nonlinearity, but rather the fact that soliton solutions of the nonlinear wave equation are very stable: even for substantial deviations of the initial pulse from the exact soliton solution, the pulse automatically "finds" correct soliton shape shredding some of its energy into a socalled dispersive wave, a weak background which has too little intensity to experience significant nonlinear effects and temporally broadens as a result of dispersion. Solitons are also very stable against changes of the properties of the medium, provided that these changes occur over distances which are long compared to the socalled soliton period (defined as the propagation distance in which the constant phase delay is $\pi/4$). This means that solitons can adiabatically adapt their shape to slowly varying parameters of the medium. Also, solitons can accommodate to some amount of higher-order dispersion; they than automatically adjust their chane to

achieve the mentioned balance under the given conditions.

If the pulse energy is the square of an integer number times the fundamental soliton energy, one has a so-called higher-order soliton. Such pulses do not have a preserved shape, but their shape periodically varies, with the period being the above mentioned soliton period. However, higher-order solitons can break up into fundamental solitons under the influence of higher-order dispersion and other disturbing effects. They are by far not as stable as fundamental solitons.

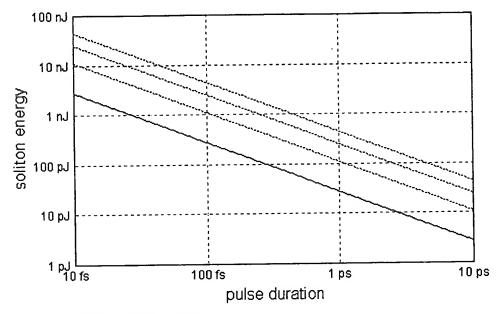


Fig.: Relation between soliton pulse energy and pulse duration in a single-mode fiber. The solid curve applies to fundamental solitons, the dotted curves to higher-order solitons (orders 2, 3, 4).

pulses soliton Fundamental technically very important, in particular optical long-distance communications and in mode-locked lasers (→ soliton mode locking). In the latter situation, soliton-like pulses can be formed when the typically lumped pieces of dispersion and nonlinearity in the laser cavity are sufficiently weak per cavity round trip. Solitons are also applied in various techniques for pulse compression using optical fibers; an adiabatic soliton example is compression.

Soliton propagation, possibly with additional disturbing effects, can be investigated with numerical simulations

(→ pulse propagation modeling). There are also some analytical tools, e.g. soliton perturbation theory, where one derives equations for small deviations of pulses from the ideal soliton shape.

Apart from the temporal solitons as discussed above, there are also *spatial solitons*. In that case, a nonlinearity of the medium (possibly of photorefractive type) cancels the diffraction, so that a beam with constant beam radius can be formed even in a medium which would be homogeneous without the influence of the light beam.

References

 L. F. Mollenauer, R. H. Stolen, and J. P. Gordon, "Experimental observation of picosecond pulse narrowing and solitons in optical fibers", Phys. Rev. Lett. 45, 1095 (1980)

See also: Kerr effect, dispersion, soliton period, sech²-shaped pulses, higher-order solitons, adiabatic soliton compression, pulse compression, Gordon-Haus jitter, pulse propagation modeling

Ask RP Photonics for advice on details of soliton pulse propagation, e.g. numerical modeling.



Last update: 2006-02-19

partrofthe Virtual Library

Encyclopedia of Laser Physics and Technology Dr. Rüdiger Paschotta

М В С D E R S Т Z Р Q 0

Quasi-soliton pulses

home | previous | next | feedback

Definition: soliton-like pulses in lasers or fiber-optic links

Optical pulses circulating in the cavity of a mode-locked laser can experience chromatic dispersion and the Kerr nonlinearity. If the dispersion is anomalous, this can lead to the formation of quasisoliton pulses. These are not exactly solitons, since the dispersion and nonlinearity usually come in discrete portions, and the pulse energy varies during a cavity round trip. Nevertheless, the pulses may behave like solitons if the effects of dispersion and nonlinearity are not too strong during one round trip, and other effects are still weaker. One can then exploit the advantages of soliton mode locking, namely the generation of rather short pulses with low chirp.

A special kind of quasi-soliton pulses has been discovered in semiconductor lasers, particularly in vertical external cavity surface-emitting lasers (VECSELs). Here, the effect of the Kerr nonlinearity is usually rather weak, but light-induced changes of the carrier density can lead to nonlinear phase changes which are similar to those from the Kerr effect with negative n_2 coefficient, even though they do not instantly follow the variations of optical intensity. In that case, quasi-soliton pulses can be formed in the normal dispersion regime. A consequence is that the pulses can be close to the Fourier transform limit.

Soliton-like pulses also occur in fiber-optic links.

Reference:

- R. Paschotta et al., "Soliton-like pulse shaping mechanism in passively mode-locked surface-emitting semiconductor lasers", Appl. Phys. B 75, 445 (2002)

See also: solitons, mode locking, soliton mode locking

This encyclopedia is provided by



Utilize this expertise also in the form of consulting services!

Comparison of Technologies

Get a solid basis for your technological and investment decisions. RP Photonics gives impartial advice.

In-House Staff Training

e.g. on diode-pumped solid state lasers, nonlinear frequency conversion, fiber optics, etc.: tailored courses will boost the effectiveness of your team!

RP Q-switch

A powerful software tool for designing Q-switched lasers. See the details.

offers femtosecond fiber lasers and optical frequency synthesizers.

Europhoton 2006 Conference

in Pisa, Italy, Sept. 10-15: submit your paper now! Deadline: April 19.

Laser Modeling

e.g. concerning cavity design, optimized power efficiency, beam quality, etc.: the key to advanced product designs. Contact RP Photonics!

Your Advertisement at This Place

will be seen by many thousands of visitors per month. Check the details. This is the html version of the file http://www.physics.ohio-state.edu/~dws/class/880.uf/hw/hw05.mod.pdf. Google automatically generates html versions of documents as we crawl the web. To link to or bookmark this page, use the following url: http://www.google.com/search?

q=cache: IUPQXAaVGrAJ: www.physics.ohio-

state.edu/~dws/class/880.uf/hw/hw05.mod.pdf+soliton+pulses+definition&hl=en&gl=us&ct=clnk&cd=5

Google is neither affiliated with the authors of this page nor responsible for its content.

These search terms have been highlighted: soliton pulses definition

Page 1

Changes to problems 3 and 4 from HW #5 and a modest simplification.

The changes.

o instead of the intensity FWHM pulse width τ (i) Agrawal and many others use T o is the characteristic time for a sech pulse according dispersion lengths where T $_{\rm p} = 1.763 * T$ o for a sech pulse. $E=E_{o}$ sech(t/T $_{o}$). As given in the class notes, τ dispersion lengths are defined as:

$$L_{D} = \frac{T_{0}^{2}}{\beta_{2}} \quad and \quad L'_{D} = \frac{T_{0}^{3}}{\beta_{3}}$$

assian pulse with τ $_{p} = 100$ fs so it makes $_{0}$ defined by E = E $_{0}$ exp[- t^{2}/T_{0}^{2}]. In this cas The homework problem specifies a Gaussian pulse with τ characteristic time for a Gaussian T $\tau_p = 1.665*~T_0$ to find T_0 , but people often use the relation for a sech pulse anyway. isn't large, so do as you see fit. Just make clear what your choice is.

The reason for the emphasis on sech pulses is that soliton pulses have a sech profile. So interesting in their own right and are of key interest for high-speed communications.

- (ii) I'd like to change the information requested as well.
 - (a) Plot the spectral phase at z=L in addition to the other plots.
 - (b) Use a medium length of $\pi/2$ and π and don't worry about plotting the spectrum. This you see what is going on, especially if you look at lengths intermediate between z $z = \pi/2$. You might want to take a second look at the notes section on solitons and definition of "N".

The simplification. You can do the following instead if you like:

The NSE is:

$$\frac{\partial A}{\partial z} = -\frac{i}{2} \beta_2 \frac{\partial^2 A}{\partial \tau^2} + \frac{1}{6} \beta_3 \frac{\partial^3 A}{\partial \tau^3} + i \gamma A^2 A$$

where $A(z,\tau)$ is the electric field envelope. Recall we have $A(z,\tau) = P_{o}U(z,\tau)$,

ON THE STATE OF TH bstell's

Almost 160,000 entities and 200,000 deanitions.

- · Entries for words often misused or confused include a clear, authoritative guide to good usage.
- Aboush one entitle —onther weaken extensive ment eather the work wants work work with the control of the contro
- The newests in the famous Collegiate seites, the industrial widely approved diedonary for home, sehool and office.

ianifest-: full of meticu-:R -- 50g solici-attitude

ncero -Gk holos al cavity hetweet

not interlying, or
m) 3 a
gy : COMquality or
rmly and
o (waited party) c
PRUDENT:
character
al or con(~ gold)
ss n

or sphere) suspension qualities of solid: as a joined tosoldago, an L solidare.

No. Amerread at the ne on a unit

931) : 50Ll ris-tik\ adj haracterized olid] (1848) community with figures

make solid. ly fixed (fac-pact, or hard state of being

mpression of as formed by iture, or reactor behavior of stals of a sub-perfections on izing the elec-not utilizins

fr. L. solid onstantine and

uction-, fluction at FLIND] (ca. terial (as soil)

splil-o-quize \,kwiz\ vi -quized; -quiz-ing (1759): to utter a solilo-quy: alk to one-self—so-lili-o-quiz-er n splil-o-quy \sa-lili-s-kwe\ n, pl -quies [LL solilo-quium, fr. L solus alone + [oqui to speak] (ca. 1604) 1: the act of talking to one-self 2: a dramatic monologue that gives the illusion of being a series of unspoken reflections

as n, n, pl-tar-ies (15c) 1: one who lives or seeks to live a solitary fitter. HereLUSE-2:—solitary confinement in prison skilons ('sal->-tanz', n pl [solitary + l-n] (ca. 1975): solitary waves l in a gas-ous plasma) that retain their shape and speed after collid-

is in a gaseous plasma) that retain their shape and speed after colliding with each other white \$\footnote{\sigma} = \cdots \text{inder} \text{inder} \cdots \text{inder} \cdots \text{inder} \cdots \text{inder} \cdots \text{inder} \cdots \text{inder} \cdots \text{ind

soling deliberate withdrawal from the world or retirement to a quiet life.

Bitudinar-i-an \sal-a-1(y)\tid-2n-'er-\tilde{c}-an\ n [L solitudin-, solitudo + \tid-arian] (1691): RECLUSE

Biteret \sal-2-'ret\ n [F] (1826): a flexible steel shoe forming part of a redeval suit of armor — see ARMOR illustration

Bitudinar-i-an \sal-a-\tide{c}-arian [I] (1826): a flexible steel shoe forming part of a redeval suit of armor — see ARMOR illustration

Bitudinar-i-an \sal-a-\tide{c}-arian [I] (1730): the act, practice, or red of using syllables to denote the tones of a musical scale

blo \sic-(\tilde{c})\tilde{c}\tilde{c}-arian [I] (1730): the act, practice, or red of using syllables to denote the tones of a musical scale

blo \sic-(\tilde{c}\tilde{c}-arian [I]) (1695) 1 or pl

all \sid-(\tilde{c}\tilde{c}-arian [I]) (1695) 1 or pl

all \sid-(\tilde{c}\tilde{c}-arian [I]) (1695) 1 or pl

all \sid-(\tilde{c}\tilde{c}-arian [I]) (1695) 1 or pl

all \sid-(\tilde{c}-arian [I]) (1695) 1 or prior similar work 2: a performance in which the performer has a partner or associate 3: any of several card games in which a partner elects to play without a partner against the other players

\tide\tilde{c}-arian [I] (172): without a companion: ALONE (I]) \sid-\tilde{c}-arian [I] (172): without a companion: ALONE (I]) \sid-\tilde{c}-arian [I] (1736): of, relating to, or being a solo \(\lambda \sid-\tilde{c}-\tild

sen transfers forming a 0-pointed set in a wise and skillful lawgiver to be sense in pointed set in the sense in pointed set in the sense in pointed lawgiver in the sense in pointed to sense in poorly drained that consists our sense in poorly drained the sense in poorly drained the

Source also solo-nets \säl-2-'nets\ n [Russ solonets salt not extracted function] (1936): any of a group of intrazonal dark hard alkaline the order by leaching and alkalizing from solonchak — sol-o-netz-ic

robottion] (1936): any of a group of intrazonal uais half demanded to the doby leaching and alkalizing from solonchak — sol-o-netz-ic blood by leaching and alkalizing from solonchak — sol-o-netz-ic blood by leaching and alkalizing from solonchak — sol-o-netz-ic blood by leaching and alkalizing from solonchak — sol-o-netz-ic blood by leaching and up to the end of the time that solonchap as a conj (15c) 1: during and up to the end of the time that solonchap as a solonc

tisl-ya-bal\ adj [ME, fr. MF, capable of being loosened or being loosened or more at loosen. It is susceptible of being dissolved in or as if in a fluid the loosen could be a susceptible of being dissolved in or as if in a fluid the loosen could be a susceptible of being dissolved in or as if in a fluid the loosen could be a susceptible of being dissolved in or as if in a fluid the loosen could be a susceptible of being dissolved in or as if in a fluid the loosen could be a susceptible of being dissolved in or as if in a fluid the loosen could be a susceptible of being loosened or an or as if in a fluid the loosen could be a susceptible of being loosened or an or as if in a fluid being loosened or as if in

so·lum \'sō-ləm\ n, pl so·la \-lə\ or solums [NL. fr. L. ground, soil] (1935): the altered layer of soil above the parent material that includes the A- and B-horizons

so-lus \'sō-los\ adv or adj [L] (1599): ALONE - often used in stage di-

so-lus \sō-los\ adv or adj [L] (1999): ALONE—SIGN. SO-lus \sō-los\ adv or adj [L] (1999): ALONE—SIGN. SO-lut \signal \text{"Sil-, yūt\ n [L solutus, pp.] (1902): a dissolved substance so-luction \so-luction \so-luction [ME, fr. MF, fr. L solution, solutio, fr. solutus, pp. of solvere to loosen, solve) (14c) 1 a: an action or process of solving a problem b: an answer to a problem: EXPLANATION: specif: a set of values of the variables that satisfies an equation 2 a: an act or the process by which a solid, liquid, or gaseous substance is homogeneously mixed with a liquid or sometimes a gas or solid b: a homogeneous mixture formed by this process; sp: a single-phase liquid system e: the condition of being dissolved 3: a bringing or coming to an end or into a state of discontinuity solution set n (1959): the set of values that satisfy an equation; also: TRUTH SET

solution set n (1959): the set of values that satisfy an equation; also : TRUTH SET

So-lu-tre-an \so-\frac{1}{u}-tre-on\ adj [Solutré, village in France] (1888): of or relating to an upper Paleolithic culture characterized by leaf-shaped finely flaked stone implements

solv-able \sid-va-bol, \sol-\ adj (1676): susceptible of solution or of being solved, resolved, or explained — solv-abil-ity \sid-va-bil-ot-\varepsilon, \sol-\ adj (1676): susceptible of solution or of being solved, resolved, or explained — solv-abil-ity \sid-va-bil-ot-\varepsilon, \sol-\ adj (1676): susceptible of solution or of being solved, resolved, or explained — solv-abil-ity \sid-va-bil-ot-\varepsilon, \sol-\ adj (1676): susceptible of solution or of being solved, resolved, or explained — solv-abil-ity \sid-va-bil-ot-\varepsilon, \sol-\ adj (1676): susceptible of solution or of being solved, resolved, or explained — solv-abil-ity \sid-\varepsilon sil-\varepsilon sil-\vare

sol-var \'sal-vat, 'tsol-var \'n [solvent + -ate] (1904): an aggregate that consists of a solute ion or molecule with one or more solvent molecules; also: a substance (as a hydrate) containing such ions

2 solvate w sol-vat-ed; sol-vat-ing (1917): to make part of a solvate — sol-va-tion \sal-va-shan, sol-\n

Sol-vay process \'sal-va-\n [Ernest Solvay \tau22 Belg, chemist] (1888): a process for making soda from common salt by passing carbon dioxide into ammoniacal brine resulting in precipitation of sodium bicarbonate which is then calcined to carbonate solve \'sal'\, 'sol'\v\ b solved; solv-ing [ME solven to loosen, fr. L solvere to loosen, solve, dissolve, fr. sed-, se apart + luere to release — more at SECEDE LOSE] w (1533) I: to find a solution for \(\sim a \) problem\(2 \) : to pay (as a debt) in full \(\sim w \): to solve something (substitute the known values of the constants and \(\sim for x \) — solv-er n

sol-ven-cy \'sal-van-s\(\varepsilon \); sol-\ n (ca. 1727): the quality or state of being solvent

\alpha\but \alpha\kitten, F table \ar\further \a\ ash \alpha\ ace \alpha\ cot. car \au\ out \ch\ chin \e\ bet \e\ easy \g\ go \i\ hit \I\ ice \j \n\sing \o\ go \o\ law \oi\ boy \th\ thin \th\ the \u\ loot \u\ \y\ yet \zh\ vision \a, k, n, ce, ce, ue, te, 1\, see Guide to Pronunciat.

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

BLACK BORDERS
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
☐ FADED TEXT OR DRAWING
\square BLURRED OR ILLEGIBLE TEXT OR DRAWING
☐ SKEWED/SLANTED IMAGES
\square COLOR OR BLACK AND WHITE PHOTOGRAPHS
☐ GRAY SCALE DOCUMENTS
LINES OR MARKS ON ORIGINAL DOCUMENT
☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
☐ OTHER:

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.